

AUTOMATIC LAMINATOR – PLASTI 350 XP

AUTOMATIC DOUBLE SIDE ROLL LAMINATOR WITH HIGH PILE SUCTION FEEDER.

Single or **double side automatic laminator** with automatic separator. ideal for single side cover lamination and encapsulation with films from 25 to 250 microns.

Automatic separation will be performed either on single and double side BOPP overlapped sheets thanks to the powerful built in tear-off system.

1000mt BOPP laminating rolls can be installed on top and bottom reel holder.

Removable feeding plate will make the first set up of encapsulation easier.



75mm diameter laminating rolls will grant perfect lamination result even at maximum speed.

Independent adjustable temperature of the two laminating rollers will preserve the quality of back print in case of single side lamination.

Automatic **high pile suction feeder** controlled by machine's PLC will adjust feeding speed accordingly to laminating speed in order to keep constant gap or constant overlap between the sheets.

Adjustable de-curling bar provides flat results on single side laminations.

All the settings and operations are controlled through one single **touch screen control panel and software engineered to make machine's setting fast and easy.**

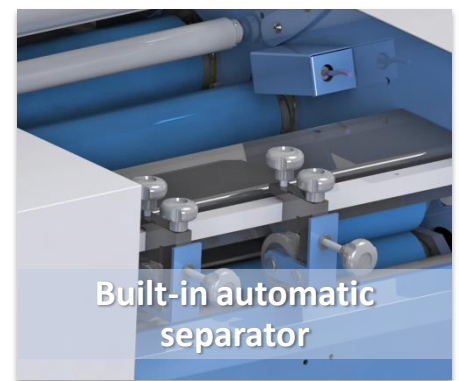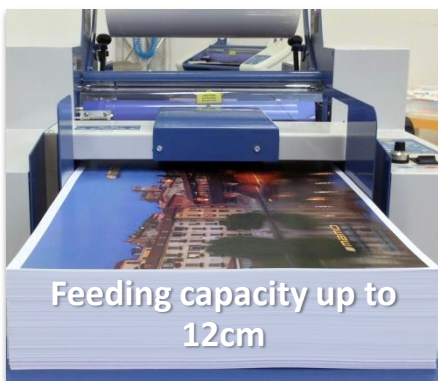


Visit our web site: www.mamosrl.com

TECHNICAL SPECIFICATIONS

- ✓ Max working width (mm): 340
- ✓ Max working width (mm): 340
- ✓ Max paper width (mm): 350
- ✓ Max paper thickness (gsm): 400
- ✓ Max temperature: 170° C
- ✓ Independent lower roller heating system can be switched off
in order to allow single side (upper) hot lamination
- ✓ Laminating speed: 5mt/min
- ✓ Control panel with preset function
- ✓ Roller pressure adjustment: manual
- ✓ Power consumption (W): 2200
- ✓ Power requirements (V - Hz): 230 - 50/60

Dimension (mm): 730x750x1420

Weight (Kg): 100

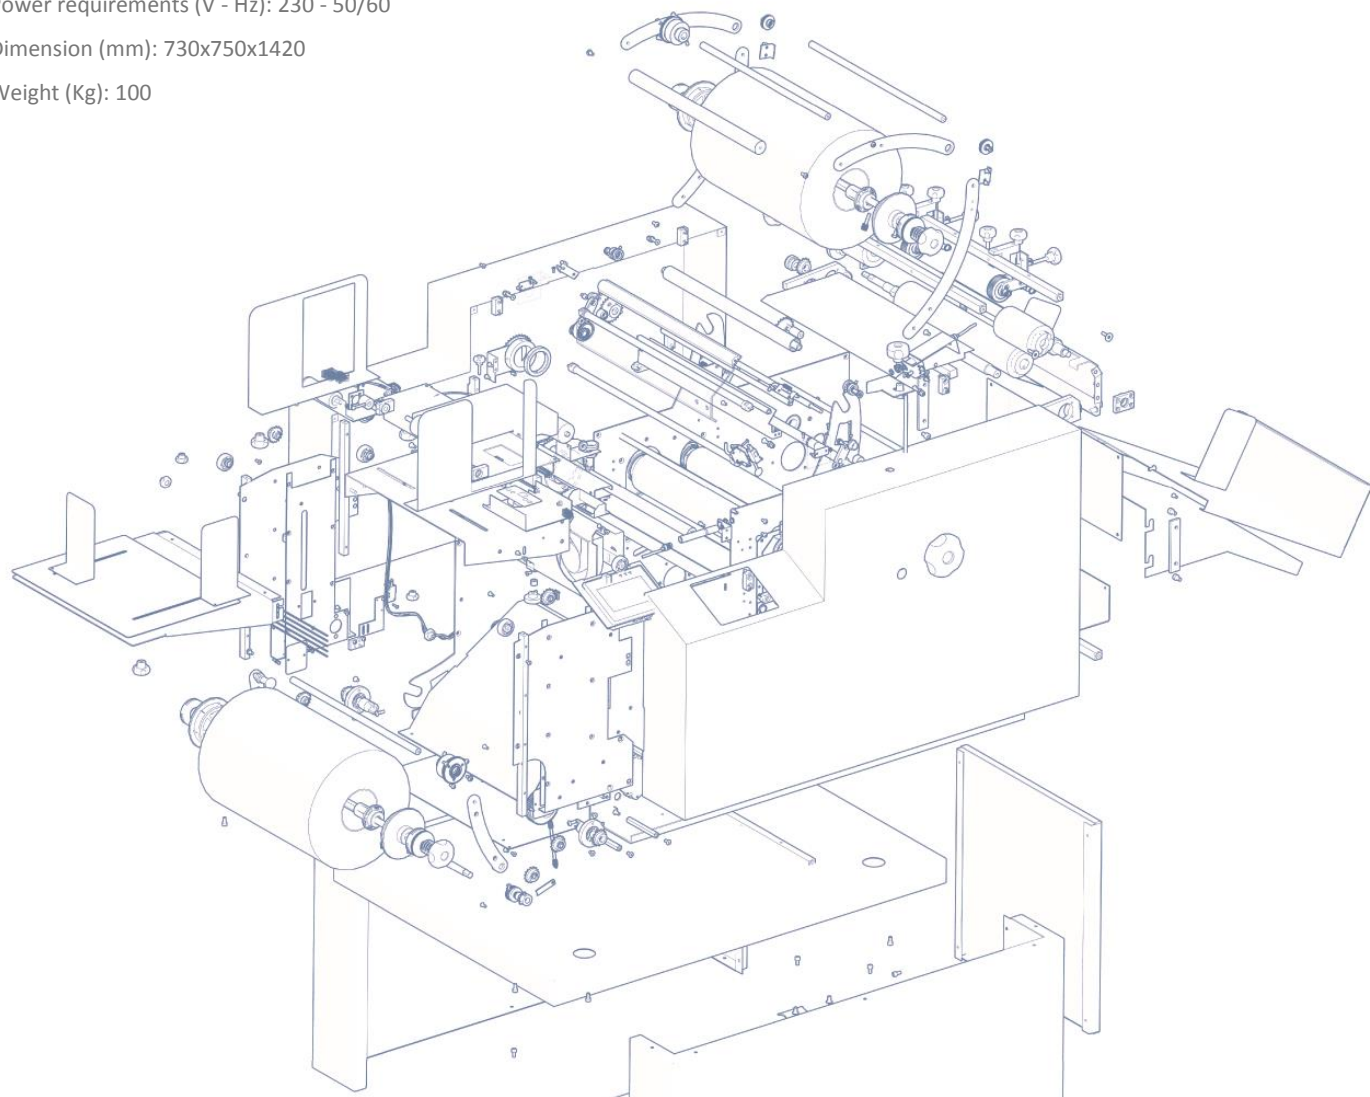

Visit our web site: www.mamosrl.com